

Hydrojetter

O'BRIEN MANUFACTURING™




Setting the Industry Standard



Call now for a
FREE Catalogue CD

O'BRIEN™
MANUFACTURING

1-800-638-1901
www.obrienmfg.com



The Original
O'Brien Root Cutter

Which O'Brien Hydrojetter™ is right for your application?

- ✓ **ALL O'BRIEN HYDROJETTERS™ BUILT WITH QUALITY - BUILT TO PASS THE TEST OF TIME.**
- ✓ **ALL O'BRIEN HYDROJETTERS™ ARE TOWABLE FULL OF WATER AT HIGHWAY SPEEDS TO YOUR JOBSITE.**
- ✓ **ALL O'BRIEN HYDROJETTERS™ ARE BUILT WITH INDUSTRIAL PUMPS AND ENGINES.**

Which color O'Brien Hydrojetter™ would you like?
Standard Colors -
Safety Yellow or White



GPM: 30 GPM
PSI: 3,000 PSI
Engine: 65HP Diesel



GPM: 40 GPM
PSI: 2,000 PSI
Engine: 65HP Diesel



GPM: 18 GPM
PSI: 4,000 PSI
Engine: 65HP Diesel



GPM: 15 GPM
PSI: 3,000 PSI
Engine: 37HP Diesel



GPM: 10 GPM
PSI: 2,500 PSI
Engine: 20HP Gas

Part Number OBM10001
Revision D

7040-SC Trailer Jetters

7040-SC

Standard Components

"Swinger" Reel—190° Pivot

Makes line cleaning a simple job because it allows for:

- Easy access to the manhole regardless of how trailer is parked
- Tethered hand operated reel control
- Variable-speed control
- Hydraulic driven
- 'Catwalk' fenders

Pump

Std. 40 GPM @ 2,000 psi
Opt. 18 GPM @ 4,000 psi
Opt. 65 GPM @ 2,000 psi

Engine

Std. Cummins 65HP diesel
Opt. John Deere diesel or Kubota diesel

Murphy safety gauges with auto-shutdown

Variable electronic throttle control



7030-SC Trailer Jetters

7030-SC

Standard Components

"Swinger" Reel—190° Pivot

Makes line cleaning a simple job because it allows for:

- Easy access to the manhole regardless of how trailer is parked
- Tethered hand operated reel control
- Variable-speed control
- Hydraulic driven
- 'Catwalk' fenders

Pump

Std. 30 GPM @ 3,000 psi

Engine

Std. Cummins 65HP diesel
Opt. John Deere diesel or Kubota diesel

Murphy safety gauges with auto-shutdown

Variable electronic throttle control



Pictured with IntelACount & IntelAControl

1-800-638-1901

Call toll-free to place your order

Specifications subject to change without notice. All prices F.O.B. Marietta, OH 45750.

Looks Professional. Performs Like One.

This unit is specially designed for the professional day-to-day sewer line cleaner. Municipalities and pumper/cleaner contractors rely on its power and versatility for cleaning a wide range of pipes. The unit has "catwalk" fenders.

Standard Components For Both

700 Gallon Polyethylene Tank

Plate mounted with sump and side baffles
Crowned top & side stabilizers for added strength
Sufficient water supply for necessary water flow
12" Manhole with basket

Tandem-Axle Trailer

The Trailer Jetter is rated to carry a full tank of water to the job . . .

- 6" channel frame
- A-frame hitch
- 2⁵/₁₆" ball hitch (pintle opt.)
- (2) 6,000 lb. DOT-rated axle
- LT-245 x 75R16 tires
- Electric brakes (surge opt.)

High-Impact Thermoplastic Sewer Hose

Easy to keep clean (retains no bacteria-causing residue).

Maintains stiffness and is abrasion resistant.

Std. 40/20 pump = 400' of 3/4" hose (7040 Series)

Std. 30/30 pump = 400' of 3/4" hose (7030 Series)

Opt. 18/40 pump = 400' of 1/2" hose

Opt. 65/20 pump = 400' of 1" hose

Additional hose can be added in 100' increments for an extra charge.

Reel capacity is 750' of 3/4" hose.

Other Standard Components

Two nozzles: penetrator & flusher

Toolbox—integrated enclosed tool & battery storage

PVC tank drain valve with stainless steel strainer

Direct driven "live" hydraulic system with 17-gallon tank

17-gallon fuel tank with cap-mounted gauge.

Air purge system

20' Leader hose contrasting color

Two (2) aux 12V power supply outlets

2" PVC fill pipe

Optional Components

- Arrowboard
- Beacon light
- Work light
- Cone holder
- Strobe light
- Root cutters & saws
- IntelACount
- IntelAControl
- Side Panels (only)
- Spare tire w/mount
- Side Panels (with your company logo)
- Wireless remote control reel
- Level wind guide w/counter
- 25' of hose with handgun & high pressure nozzle
- Recirculation system
- Cavalry nozzle kit (includes five nozzles)
- Anti-freeze system
- Foot control for hose reel (tethered)

Standard unit color is safety yellow or white - customer choice. Can be custom painted to match almost any color, for an additional charge.

3518-SC Trailer Jetters

3518-SC

Standard Components

"Swinger" Reel—190° Pivot

Makes line cleaning a simple job because it allows for:

- Easy access to the manhole regardless of how trailer is parked
- Tethered hand operated reel control
- Variable-speed control
- Hydraulic driven
- 'Catwalk' fenders

Pump

Std. 18 GPM @ 4,000 psi
Opt. 40 GPM @ 2,000 psi

Engine

Std. Cummins 65HP diesel
Opt. John Deere diesel or Kubota diesel
Opt. Gasoline engine also available

Murphy safety gauges with auto-shutdown
Variable electronic throttle control



3515-CF Trailer Jetters

3515-CF

Standard Components

"Fixed" Reel

Makes line cleaning a simple job because it allows for:

- Variable-speed control
- Hydraulic drive

Pump

Standard 15 GPM @ 3,000 psi
Compatible with OBJ-1467 root cutter

Engine

Std. 37HP diesel
Murphy safety gauges with auto-shutdown
Variable electronic throttle control



The Ultimate Workhorse

With a water tank that doubles the capacity of any smaller trailer unit and a powerful engine/pump combination, this model efficiently tackles a wide range of line cleaning duties all the way up to 24" mains. The rigid chassis and axle design give it stability, so you can haul a full tank of water at highway speeds.

Standard Components For Both

350 Gallon Polyethylene Tank

Plate mounted with sump and side baffles
Crowned top & side stabilizers for added strength
Sufficient water supply for necessary water flow
12" Manhole with basket

Single-Axle Trailer

The Trailer Jetter is rated to carry a full tank of water to the job . . .

- 6" channel frame
- A-frame hitch
- 2 $\frac{5}{16}$ " ball hitch (pintle opt.)
- 7,000 lb. DOT-rated axle
- LT-235 x 85R16 tires
- Electric brakes (surge opt.)

High-Impact Thermoplastic Sewer Hose

Easy to keep clean (retains no bacteria-causing residue).
Maintains stiffness and is abrasion resistant.

Std. 18/40 pump = 400' of $\frac{1}{2}$ " hose (3518 Series)
Std. 15/36 pump = 400' of $\frac{1}{2}$ " hose (3515-Series)
Opt. 40/20 pump = 400' of $\frac{3}{4}$ " hose

Additional hose can be added in 100' increments for an extra charge.

Reel capacity is 1000' x $\frac{1}{2}$ " hose(3518) - 620' x $\frac{1}{2}$ "(3515).

Other Standard Components

Two nozzles: penetrator & flusher

Toolbox—integrated enclosed tool & battery storage

PVC tank drain valve with stainless steel strainer
Direct driven "live" hydraulic system with 17-gallon tank

17-gallon fuel tank with cap-mounted gauge.

Air purge system

20' Leader hose contrasting color

Two (2) aux 12V power supply outlets

2" PVC fill pipe

Optional Components

- Arrowboard
- Beacon light
- Work light
- Cone holder
- Strobe light
- Root cutters & saws
- IntelACount
- IntelAControl
- Side Panels (only)
- Spare tire w/ mount
- Side Panels (with your company logo)
- Wireless remote control reel
- Level wind guide w/counter
- Auxiliary hose reel 150' of $\frac{3}{8}$ " with foot control
- 25' of hose with handgun & high pressure nozzle
- Recirculation system
- Cavalry nozzle kit (includes five nozzles)
- Anti-freeze system
- Foot control for hose reel (tethered)

Standard unit color is safety yellow or white - customer choice. Can be custom painted to match almost any color, for an additional charge.

The Big Machine at Home or the Office

For the toughest residential and commercial jobs on lines up to 15" in diameter, this unit takes your modest jetting service to the next level. As a trailer-mounted model, it carries its own water supply for ample water flow. This, combined with its horsepower, facilitates the use of a root cutter accessory. Plus, the hydraulic hose reel provides hydraulic power for even the toughest jobs.

3510-FC & 3510-E Trailer Jetter



Wireless Remote for 3510-FC (optional)



The Big Machine at Home or the Office

For the toughest residential and commercial jobs on lines up to 10" in diameter, this unit takes your modest jetting service to the next level. As a trailer-mounted model, it carries its own water supply for ample water flow. This, combined with its horsepower, facilitates the use of a root cutter accessory. Plus, the electric hose reel supports wireless remote control capabilities..

3510-FC Standard Components

300' of 1/2" thermoplastic sewer hose

3510-E Standard Components

200' of 3/8" thermoplastic sewer hose (3510-E not compatible w/root cutter)

Standard Components For Both

Optional Components

- Beacon light
- Intel-A-Count
- Work light
- Pintle hitch
- 2" PVC fill pipe (tethered)
- Wireless remote control reel
- Auxiliary Hose Reel 150' of 3/8" hose and Foot Control
- 25' of hose with handgun & high pressure nozzle
- Recirculation system
- Cavalry nozzle kit (Includes five nozzles)
- Strobe light
- Cones & cone holder
- Root cutters & saws
- Foot control for hose reel

350 Gallon Polyethylene Tank

Plate mounted with sump and side baffles
Crowned top & side stabilizers for added strength
Sufficient water supply for necessary water flow.

Electric Reel

Oversized high-torque motor for rewind.
Positive forward/reverse pressure switch.
Variable-speed control.

Giant-Triplex Pump

Standard 10 GPM @ 2,500 psi
3510-FC compatible with OBJ-1468 root cutter

Honda Engine

Twin-cylinder 20HP
Electric start with 25 amp alternator.

High-Impact Thermoplastic Sewer Hose

Easy to clean off (leaves no bacteria-causing residue).
Maintains stiffness and is abrasion resistant.
Hose reel capacity is 420' of 1/2" (3510-FC).
Hose reel capacity is 300' of 3/8" (3510-E).

Trailer

The Trailer Jetter is rated to carry a full tank of water to the job . . .

- 3" channel frame
- A-frame hitch
- 2" ball hitch
- 6,000 lb. DOT-rated axle
- ST-225 x 75R15 tires
- Electric brakes

Other Standard Components

Two nozzles: penetrator & flusher
Toolbox—aluminum diamond plate
PVC tank drain valve with stainless steel strainer
Air purge system
20' Leader hose contrasting color
Level wind guide

*Battery not included.

Accessories



IntelACount

The IntelACount is an accurate, intelligent hose footage counter built specifically to meet the demands of the water jetting industry. Using a digital micro-controller, the encoder is attached directly to the reel shaft, eliminating the worries of slippage. Using sophisticated mathematical algorithms, IntelACount will provide a precise distant count every time. The operator also has the ability to store up to 10 distance counts in the memory for recall at a later date. The IntelACount system is an indispensable option for any new O'Brien Hydrojetter and for existing jetter owners of all makes.

| Part No. | Description |
|-----------|---|
| OBJ-2430D | IntelACount |
| • | Boasts 2 1/4" bright L.E.D. digits to display the footage to 1/10-of-a-foot resolution while being viewable at distances over 150 feet away |
| • | Housed in a waterproof, dustproof, IP65 enclosure with UV-resistant membrane button, as rugged as it is accurate |



IntelAControl Wireless Remote

IntelAControl Main Control Panel




IntelAControl with Digital wireless remote control

The IntelAControl from O'Brien Manufacturing is a COMPLETE system & engine monitoring diagnostic system featuring safety shutdowns for Engine Oil, Engine Temp, Low Water, Emergency Off and MORE! The Control Box Electronics are State-of-the-Art, high powered electronics with internal over current protection. The numbers/letters display are transfective - the brighter the sun, the brighter the display and there is backlighting for nighttime operation. Each Control Box and transmitter work "independent" - no other wireless unit will interfere! Wireless digital remote control range is approximately 3,000' and this range can be extended by about 3X with the Wireless Repeater option. The IntelAControl incorporates high powered, military grade electronics and cold temperature resistant Liquid Crystal Displays. The Next Revolution in Sewer Cleaning - The IntelAControl by O'Brien Manufacturing.

| Part No. | Description |
|------------|---------------|
| OBJ-2530CP | IntelAControl |

Allows your jetting to be truly a ONE MAN operation

Toolbox Jetter

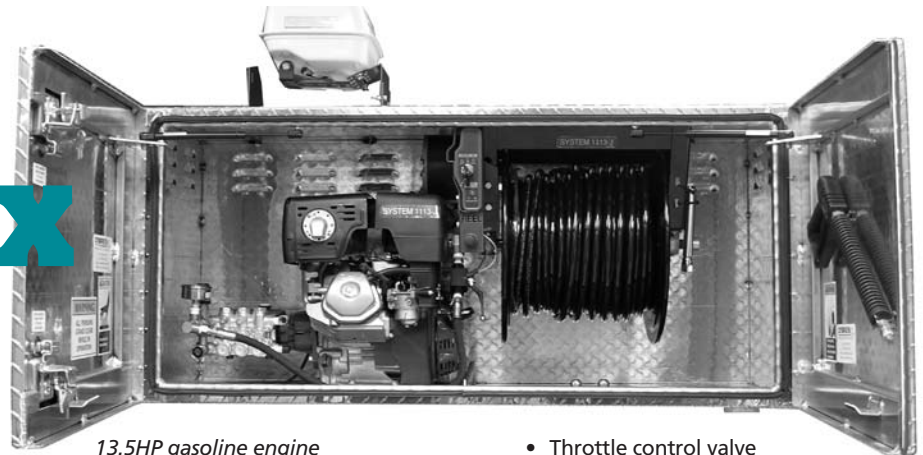

Model 1113-J

Pumpers can offer a value-added service with this space-saving unit. It packs the punch of a 13hp cart model in a convenient toolbox you can mount anywhere. Standard with manual start. Can be used to clean laterals back to house, other jetter line cleaning applications, clean the suction hose, even wash the truck.

13.5HP gasoline engine
Triplex pump—4.8 GPM @ 3,000 psi
200' of 3/4" rubber hose
350' capacity electric hose reel
Shutoff valve, washdown gun & nozzles
15° penetrating nozzle
30° flushing nozzle

Electric Start Engine Available

- 5,000 psi liquid-filled gauge
- Adjustable pressure control
- Thermal relief valve

- Throttle control valve
- Garden hose inlet with strainer
- Nozzle rack
- Entire unit measures 24"x24"x48" and weighs less than 315 lbs.
- Chrome-plated T-handle latch with key lock

Optional Components


- Polished aluminum toolbox
- Electric start
- Inlet filter

New Design

Gas/Fuel Cell Mounting - Versatile
Easy Access to Component Parts
Tool Storage
Nozzle Tray
Top Mount Hose Reel

- Toolbox
- Reinforced channel under engine for added support and stability
- Doors - Louvered; Equipped, as standard, with Gas Struts
- Double-Lock for added security - Four (4) sets of key provided
- Gas Tank
- Can be mounted where it is convenient for YOU - Inside of Toolbox or Outside - Versatile
- Brackets for Gas Tank supplied with unit at NO ADDITIONAL CHARGE
- Easy Access to ALL Component Parts

Toolbox Jetter

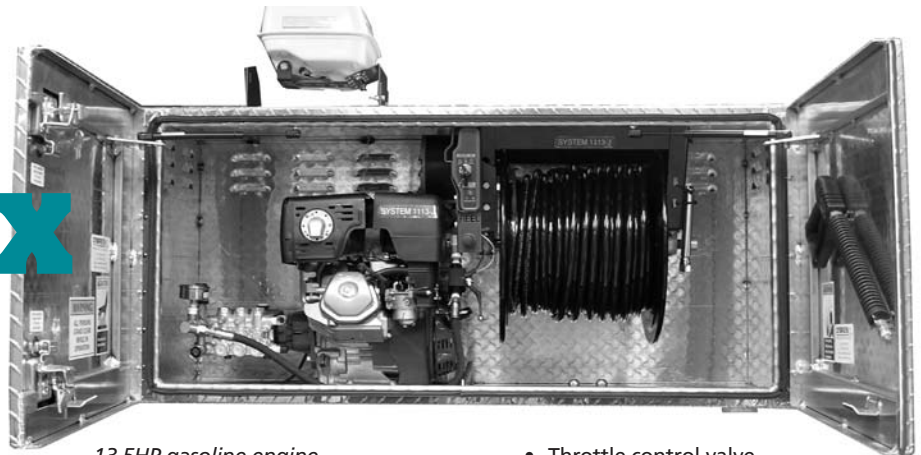

Model 1111-J

Pumpers can offer a value-added service with this space-saving unit. It packs the punch of a 13hp cart model in a convenient toolbox you can mount anywhere. Standard with manual start. Can be used to clean laterals back to house, other jetter line cleaning applications, clean the suction hose, even wash the truck.

13.5HP gasoline engine
Triplex pump—4.8 GPM @ 3,000 psi
200' of 3/4" rubber hose
350' capacity electric hose reel
Shutoff valve, washdown gun & nozzles
15° penetrating nozzle
30° flushing nozzle

Electric Start Engine Available

- 5,000 psi liquid-filled gauge
- Adjustable pressure control
- Thermal relief valve

- Throttle control valve
- Garden hose inlet with strainer
- Nozzle rack
- Entire unit measures 24"x24"x48" and weighs less than 315 lbs.
- Chrome-plated T-handle latch with key lock

Optional Components

- Polished aluminum toolbox
- Electric start
- Inlet filter

New Design

Gas/Fuel Cell Mounting - Versatile
Easy Access to Component Parts
Tool Storage
Nozzle Tray
Top Mount Hose Reel

- Toolbox
- Reinforced channel under engine for added support and stability
- Doors - Louvered; Equipped, as standard, with Gas Struts
- Double-Lock for added security - Four (4) sets of key provided
- Gas Tank
- Can be mounted where it is convenient for YOU - Inside of Toolbox or Outside - Versatile
- Brackets for Gas Tank supplied with unit at NO ADDITIONAL CHARGE
- Easy Access to ALL Component Parts

1220-J Cart Jetter

This economical and portable electric unit is perfect for pumper/cleaners dedicated to small residential applications with 4" diameter lines or smaller.

Includes:

- 2.0HP motor—19.8 amp @ 110 volts*
- Triplex pump—1.7 GPM @ 1,500 psi
- Durable powder-coated cart
- 10" semi-pneumatic tires
- Front bumper bar protects pump and motor
- ¼" 15° penetrating nozzle
- ¼" 30° flushing nozzle
- Nozzle storage rack
- 150' capacity hose reel
- 100' ¼" high impact sewer hose
- 25' cord with ground fault circuit interrupter
- 3,000 psi liquid-filled gauge
- Thermal relief valve
- Garden hose inlet with strainer
- Electric Plug w/GFCI
- Easy-to-clean inline filter

Available options:

- Pulsator
 - ½" trap hose nozzle
 - 25' of ½" trap hose with swivel
 - 220-volt capability*
- *(cord, plug and circuit breaker not included)

Dimensions of 2-wheel cart:

Height – 50 1/2"
Width – 17 1/2"
Length – 31"
Weight – 235 lbs.



2500 Series Cart Jetter

Cart Jetters

These user-friendly models are geared for residential and commercial sewer lines up to 6" in diameter. The optional lateral cleaning kit package allows you to leave the engine outside a building while you clean an inside line. With an automatic throttle control valve, the engine responds to your water usage. Open the flow, and it revs up to maintain maximum pressure. Cut the flow, and it idles down for reduced noise, pump wear, and engine wear.

2511-J Includes:

- 11.5HP manual start gasoline engine
- Triplex pump - 4.0 GPM @ 3,000 psi

2513-J Includes:

- 13.5HP manual start gasoline engine
- Triplex pump - 4.8 GPM @ 3,000 psi

Dimensions of 2-wheel cart:

Height – 46"
Width – 24"
Length – 59"
Weight – 255 lbs. (2513-J)
283 lbs. (2513-JE)
235 lbs. (2511-J)
275 lbs. (2511-JE)

2500 Series Complete Kit Includes:

- Durable powder-coated cart
- 10" semi-pneumatic tires
- Two Nozzles - ¾" Penetrator and ¾" Flusher
- Nozzle storage rack
- 300' capacity hose reel w/positive locking
- 200' of ¾" High-Impact sewer hose
- Thermal relief valve
- Throttle control valve
- ¾" 3,000 psi ball valve
- Unloader
- Pulsator
- 5,000 psi liquid-filled gauge
- Drip pan
- Tool storage tray
- Adjustable pressure control
- Garden Hose inlet with strainer



Available Options

- Filter Inlet
 - Washdown Gun Package
 - Lateral Cleaning Kit Package
 - ¾" Trap Hose Package
 - Luggage Style Hose reel Handle
 - 4-Wheel Conversion Kit
 - Auxiliary Hose Reel with Luggage Style Handle, Wheels
 - Electric Start Engine
- (Pictured Above)



*Battery not included.


www.obrienmfg.com

2-wheel cart is easy to load and unload in your vehicle and transport up and down steps.

Visit Our Website for more parts & accessories

Root Cutters

The Original
O'Brien Root Cutter

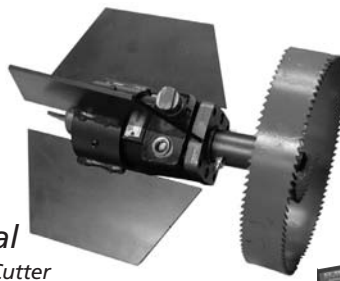

Root Cutter Accessories



J-3201 (3/4" and 1" sizes)

Standard kit includes:

- Toolbox and tools
- 6", 8" and 10" skids
- 6", 8" and 10" saws

Available in 1" and 3/4" inlet

2,000 psi operating pressure

1" operates @ 60-65 GPM

3/4" operates @ 30-35 GPM

Cleans 6" to 20" lines

300 lbs./in. of torque up to 800 rpm

Accurate centering and easy maintenance

Optional skids and saws available: 6", 8", 10", 12", 15" and 18"

J-3200 (3/4" and 1" sizes)

Standard kit includes:

- Toolbox and tools
- 6", 8", 10", 12" and 15" skids
- 6", 8", 10", 12" and 15" saws

Available in 1" and 3/4" inlet

2,000 psi operating pressure

1" operates @ 60-65 GPM

3/4" operates @ 30-35 GPM

Cleans 6" to 20" lines

300 lbs./in. of torque up to 800 rpm

Accurate centering and easy maintenance

Optional skids and saws available: 6", 8", 10", 12", 15" and 18"

J-3203 (3/4" and 1" sizes)

Standard kit includes:

- Toolbox and tools
- 6", 8", 10" and 12" skids
- 6", 8", 10" and 12" saws

Available in 1" and 3/4" inlet

2,000 psi operating pressure

1" operates @ 60-65 GPM

3/4" operates @ 30-35 GPM

Cleans 6" to 20" lines

300 lbs./in. of torque up to 800 rpm

Accurate centering and easy maintenance

Optional skids and saws available: 6", 8", 10", 12", 15" and 18"

OBJ-1467/OBJ-1468 (Available in 1/2" only)

Standard kit includes:

- Toolbox and tools
- 4", 6" and 8" skids
- 4", 6" and 8" saws

OBJ-1468: 800-2,500 psi operating pressure & Flow rate 10 GPM

OBJ-1467: 800-4,000 psi operating pressure & Flow rates up to 18 GPM

Powered by the Jetter's water pressure, these fierce root cutters spin at extremely high torque. For maximum effectiveness, the skids keep the unit centered in the pipe while the rear jets keep it pressed against the root. In addition, the saw blades, which are heat treated for super durability, feature teeth on both edges. One edge tears on the way in and the other trims clean on the way back.

Choose the right root cutter for your Jetter based on its water flow/pressure rating. Note that skids and saws are available for different size pipes.

Note: Our Root Cutters all use the same saw blades.

The Ripper and other Root Cutter parts are still available.

Root Cutter Toolbox

| Part No. | Description |
|----------|---------------------|
| J-1606 | Root cutter toolbox |

Skid Assemblies

| Part No. | Description |
|----------|--------------------|
| J-3206 | 6" skids w/sleeve |
| J-3208 | 8" skids w/sleeve |
| J-3210 | 10" skids w/sleeve |
| J-3212 | 12" skids w/sleeve |
| J-3215 | 15" skids w/sleeve |
| J-3218 | 18" skids w/sleeve |

The Crust Buster

| Part No. | Blade Size |
|----------|------------------------|
| M-3308 | 8" Spiral Crust Buster |

Standard Spiral Saw Blades

| Part No. | Blade Size |
|----------|-----------------------------|
| M-1003 | 3" spiral |
| M-1004 | 4" spiral |
| M-1006 | 6" spiral |
| M-1008 | 8" spiral |
| M-1010 | 10" spiral |
| M-1012 | 12" spiral |
| M-1015 | 15" spiral |
| M-1018 | 18" spiral |
| J-1700 | Chuck for 1" root saw motor |

Concave Spiral Saw Blades

| Part No. | Blade Size |
|----------|-----------------------------|
| M-2004 | 4" concave |
| M-2006 | 6" concave |
| M-2008 | 8" concave |
| M-2010 | 10" concave |
| M-2012 | 12" concave |
| M-2015 | 15" concave |
| M-2018 | 18" concave |
| J-1700 | Chuck for 1" root saw motor |

Tapered Spiral Saw Blades

| Part No. | Blade Size |
|----------|-----------------------------|
| M-3004 | 4" tapered |
| M-3006 | 6" tapered |
| M-3008 | 8" tapered |
| M-3010 | 10" tapered |
| M-3012 | 12" tapered |
| M-3015 | 15" tapered |
| M-3018 | 18" tapered |
| J-1700 | Chuck for 1" root saw motor |

NOTE: Chucks not included. Call your sales rep for additional sizes.

Expandable Blades (sets of three)

| Part No. | Blade Size/Description |
|----------|------------------------|
| M-7000 | "T" handle wrench |
| M-7004 | 4" blade |
| M-7006 | 6" blade |
| M-7008 | 8" blade |
| M-7010 | 10" blade |
| M-7012 | 12" blade |
| M-7015 | 15" blade |
| M-7018 | 18" blade |
| J-7000 | Chuck assembly |



Sewer Squadron


Nozzle Kits

Get an Arsenal of Nozzles
in One Economical Kit!



Infantry Kits—
Penetrator, Flusher and
Polisher

| Kit No. | Nozzle Size | GPM | PSI |
|----------|-------------|-----|-------|
| 180430IN | 1/8" | 4 | 3,000 |
| 140430IN | 1/4" | 4 | 3,000 |
| 380530IN | 3/8" | 5 | 3,000 |
| 121536IN | 1/2" | 15 | 3,600 |
| 121840IN | 1/2" | 18 | 4,000 |
| 121025IN | 1/2" | 10 | 2,500 |
| 344020IN | 3/4" | 40 | 2,000 |

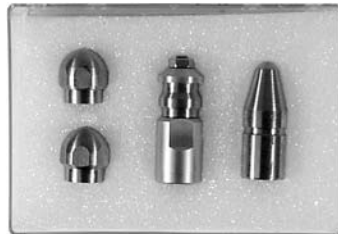

Artillery Kits—
Penetrator,
Flusher, Polisher and
Degreaser/De-Icer

| Kit No. | Nozzle Size | GPM | PSI |
|----------|-------------|-----|-------|
| 180430AR | 1/8" | 4 | 3,000 |
| 140430AR | 1/4" | 4 | 3,000 |
| 380530AR | 3/8" | 5 | 3,000 |
| 121536AR | 1/2" | 15 | 3,600 |
| 121840AR | 1/2" | 18 | 4,000 |
| 121025AR | 1/2" | 10 | 2,500 |
| 344020AR | 3/4" | 40 | 2,000 |



Cavalry Kits—
Penetrator,
Flusher, Polisher,
Degreaser/De-Icer and
Impactor

| Kit No. | Nozzle Size | GPM | PSI |
|----------|-------------|-----|-------|
| 180430CA | 1/8" | 4 | 3,000 |
| 140430CA | 1/4" | 4 | 3,000 |
| 380530CA | 3/8" | 5 | 3,000 |
| 121536CA | 1/2" | 15 | 3,600 |
| 121840CA | 1/2" | 18 | 4,000 |
| 121025CA | 1/2" | 10 | 2,500 |
| 344020CA | 3/4" | 40 | 2,000 |

Nozzle Types (Sold Individually)

Penetrator—Penetrates the clog and restores drainage.

| Part No. | Nozzle Size | GPM | PSI | Jet Angle | Forward Jets | Rear Jets |
|----------|-------------|-----|-------|-----------|--------------|-----------|
| 180430PE | 1/8" | 4 | 3,000 | 25° | 1 | 3 |
| 140430PE | 1/4" | 4 | 3,000 | 25° | 1 | 3 |
| 380530PE | 3/8" | 5 | 3,000 | 30° | 1 | 3 |
| 121536PE | 1/2" | 15 | 3,600 | 20° | 1 | 3 |
| 121840PE | 1/2" | 18 | 4,000 | 25° | 1 | 3 |
| 121025PE | 1/2" | 10 | 2,500 | 30° | 1 | 3 |
| 344020PE | 3/4" | 40 | 2,000 | 30° | 1 | 3 |

Flusher—Removes excess left in the line;
opens it up to near full capacity.

| Part No. | Nozzle Size | GPM | PSI | Jet Angle | Forward Jets | Rear Jets |
|----------|-------------|-----|-------|-----------|--------------|-----------|
| 180430FL | 1/8" | 4 | 3,000 | 45° | 0 | 6 |
| 140430FL | 1/4" | 4 | 3,000 | 45° | 0 | 6 |
| 380530FL | 3/8" | 5 | 3,000 | 30° | 0 | 6 |
| 121536FL | 1/2" | 15 | 3,600 | 40° | 0 | 6 |
| 121840FL | 1/2" | 18 | 4,000 | 30° | 0 | 6 |
| 121025FL | 1/2" | 10 | 2,500 | 45° | 0 | 6 |
| 344020FL | 3/4" | 40 | 2,000 | 45° | 0 | 6 |

Polisher—Opens the line to full capacity by "polishing"
the inside. The smooth finish left on the interior of the line
helps prevent a recurring clog for a longer period of time.

| Part No. | Nozzle Size | GPM | PSI | Jet Angle | Forward Jets | Rear Jets |
|----------|-------------|-----|-------|-----------|--------------|-----------|
| 180430PO | 1/8" | 4 | 3,000 | 45°/90° | 0 | 4 |
| 140430PO | 1/4" | 4 | 3,000 | 45°/90° | 0 | 4 |
| 380530PO | 3/8" | 5 | 3,000 | 45°/90° | 0 | 4 |
| 121536PO | 1/2" | 15 | 3,600 | 0°/35° | 0 | 4 |
| 121840PO | 1/2" | 18 | 4,000 | 25°/90° | 0 | 4 |
| 121025PO | 1/2" | 10 | 2,500 | 25°/90° | 0 | 4 |
| 344020PO | 3/4" | 40 | 2,000 | 25°/90° | 0 | 4 |

Degreaser/De-Icer—Useful in lines heavily clogged
or blocked by grease, hard soap or ice.

| Part No. | Nozzle Size | GPM | PSI | Jet Angle | Forward Jets | Rear Jets |
|----------|-------------|-----|-------|-----------|--------------|-----------|
| 180430DE | 1/8" | 4 | 3,000 | 45° | 3 | 6 |
| 140430DE | 1/4" | 4 | 3,000 | 45° | 4 | 6 |
| 380530DE | 3/8" | 5 | 3,000 | 45° | 4 | 6 |
| 381025DE | 3/8" | 10 | 2,500 | 30° | 4 | 6 |
| 121536DE | 1/2" | 15 | 3,600 | 45° | 4 | 6 |
| 121840DE | 1/2" | 18 | 4,000 | 30° | 4 | 6 |
| 121025DE | 1/2" | 10 | 2,500 | 30° | 4 | 6 |
| 344020DE | 3/4" | 40 | 2,000 | 25° | 4 | 6 |

Impactor—The tipped end helps remove sand, grit and light scale.

| Part No. | Nozzle Size | GPM | PSI | Jet Angle | Forward Jets | Rear Jets |
|----------|-------------|-----|-------|-----------|--------------|-----------|
| 180430IM | 1/8" | 4 | 3,000 | 45° | 4 | 6 |
| 140430IM | 1/4" | 4 | 3,000 | 45° | 4 | 6 |
| 380530IM | 3/8" | 5 | 3,000 | 45° | 4 | 6 |
| 121536IM | 1/2" | 15 | 3,600 | 45° | 4 | 6 |
| 121840IM | 1/2" | 18 | 4,000 | 45° | 4 | 6 |
| 121025IM | 1/2" | 10 | 2,500 | 45° | 4 | 6 |
| 344020IM | 3/4" | 40 | 2,000 | 45° | 4 | 6 |

All nozzles on this page are stainless steel.

1-800-638-1901

Call toll-free to place your order

Specifications subject to change without notice. All prices F.O.B. Marietta, OH 45750.

Water Jet Nozzles

Flusher Nozzle With Standard Vortex

Flushes material from the line. 15° jet angle accelerates the hose up the line faster. 30° jet angle cleans the line better when hose is pulled back.



| Part No. | Size | GPM | # Rear Jets | # Forward Jets | Jet Angle |
|----------|------|-----|-------------|----------------|-----------|
| J-1030 | 1" | 65 | 12 | 0 | 15°/30° |
| J-1015 | 1" | 65 | 6 | 0 | 30° |
| J-1021 | 1" | 65 | 6 | 1 | 30° |
| J-1003 | ¾" | 35 | 6 | 0 | 30° |
| J-1007 | ¾" | 35 | 6 | 1 | 15° |
| J-1009 | ¾" | 35 | 6 | 0 | 30° |

Penetrator Nozzles

Forward jet "penetrates" through line. Typically, this is the first nozzle to use when there is a sign of blockage.



| Part No. | Size | GPM | # Rear Jets | # Forward Jets | Jet Angle |
|-----------|------|-----|-------------|----------------|-----------|
| J-1103 | 1" | 65 | 5 | 1 | 30° |
| J-1103-80 | 1" | 80 | 5 | 1 | 30° |
| J-1104 | 1" | 65 | 5 | 0 | 30° |
| J-1104-80 | 1" | 80 | 5 | 0 | 30° |
| J-1102 | ¾" | 35 | 5 | 0 | 30° |

Radial and Radial Vortex Nozzles

Rear jets with alternating jet angles combine quick hose acceleration and thorough line cleaning characteristics.



| Part No. | Size | GPM | # Rear Jets | # Forward Jets | Jet Angle |
|----------|------|-----|-------------|----------------|-----------|
| J-1140 | 1" | 65 | 6 | 1 | 18°/24° |
| J-1141 | 1" | 65 | 6 | 1 | 30° |
| J-1143 | 1" | 65 | 6 | 1 | 15° |
| J-1145 | 1" | 65 | 6 | 0 | 30° |
| J-1147 | 1" | 65 | 6 | 0 | 15° |
| J-1149 | 1" | 55 | 6 | 1 | 18°/24° |
| J-1130 | ¾" | 35 | 6 | 1 | 30° |
| J-1132 | ¾" | 35 | 6 | 1 | 18°/24° |

All nozzles on this page are stainless steel.

ENZ Nozzles available!!

Call for pricing. When ordering please supply:
GPM
PSI
Hose Length and Hose Size

Radial Short Nozzles

Shorter body enables these nozzles to turn corners in smaller pipes.



| Part No. | Size | GPM | # Rear Jets | # Forward Jets | Jet Angle |
|----------|------|-----|-------------|----------------|-----------|
| J-1138 | 1" | 55 | 6 | 1 | 30° |
| J-1152 | 1" | 65 | 10 | 1 | 30° |
| J-1131 | ¾" | 35 | 6 | 1 | 30° |

Spear Point Nozzles

These nozzles feature reduced rear jet angles for extremely quick acceleration up the line.



| Part No. | Size | GPM | # Rear Jets | # Forward Jets | Jet Angle |
|----------|------|-----|-------------|----------------|-----------|
| J-1135 | 1" | 65 | 6 | 1 | 16° |
| J-1148 | 1" | 65 | 6 | 0 | 16° |
| J-1150 | 1" | 65 | 6 | 1 (4 side) | 16° |
| J-1134 | ¾" | 35 | 6 | 1 | 12° |
| J-1139 | ¾" | 35 | 6 | 1 (4 side) | 16° |

Sand Nozzles

Specially designed to lift and float sand that's otherwise difficult to move. With a tether tied to the nozzle's pulling eye, the hose can be drawn back and forth in the line to generate water turbulence.



| Part No. | Size | GPM | # Rear Jets | # Forward Jets | Jet Angle |
|----------|------|-----|-------------|----------------|-----------|
| J-1144 | 1" | 65 | 6 | (2 side) | 12° |

Penetrator Lance Tip Nozzles

A true dart, this nozzle features one intense forward jet and four side jets. Medium acceleration of hose makes for a more deliberate penetration of line blockage.



| Part No. | Size | GPM | # Rear Jets | # Forward Jets | Jet Angle |
|----------|------|----------|-------------|----------------|-----------|
| J-1137 | 1" | 65 | 6 | 1 (4 side tip) | 16° |
| J-1137-1 | 1" | Tip Only | N/A | 1 (4 side tip) | N/A |

Nozzle Cleaning Kit

This kit cleans various size holes of any water jet nozzle

| Part No. | Description |
|----------|---------------------|
| J-1850 | Nozzle Cleaning Kit |



Miscellaneous Nozzles

Flailing Chain Nozzles

When water begins to flow, the nozzle spins. The whipping chains then work to knock free debris and cast iron corrosion from the inside of the pipe.

| Part No. | Nozzle Size |
|-----------|--------------------------|
| J-1940-34 | ¾" Flailing chain nozzle |
| J-1040-1 | 1" Flailing chain nozzle |



Rotary Cutter Nozzles

Water flow turns this nozzle, making it an effective cutting tool for fine tree roots and materials like paper.

| Part No. | Nozzle Size |
|-----------|-------------------------|
| J-1050-14 | ¼" Rotary cutter nozzle |
| J-1050-12 | ½" Rotary cutter nozzle |
| J-1050-34 | ¾" Rotary cutter nozzle |
| J-1050-1 | 1" Rotary cutter nozzle |



Torpedo Nozzles

The torpedo's heavy weight (55 lbs.) keeps it along the base of the line. This, combined with its large diameter (5½ in.), makes it ideal for flushing sand and debris in large culverts.

| Part No. | Nozzle Size |
|----------|----------------------------|
| J-1450-A | ¾" Torpedo nozzle |
| J-1450 | 1" Torpedo nozzle assembly |



Nozzle Extensions

Fins and extension design are important for keeping the nozzle centered in smaller pipes and for preventing the hose from reversing its direction in larger pipes.

| Part No. | Nozzle Size |
|----------|-----------------------------|
| J-40-3 | ½" Nozzle extension w/o fin |
| J-40-7 | ½" Nozzle extension w/fin |
| J-40-1 | ¾" Nozzle extension w/o fin |
| J-40-5 | ¾" Nozzle extension w/fin |
| J-40-2 | 1" Nozzle extension w/o fin |
| J-40-6 | 1" Nozzle extension w/fin |



Aluminum Ram Nozzle With Replaceable Jets

Designed to bore through tough grease clogs, this nozzle features a cast aluminum body with replaceable jets for long-lasting performance.

| Part No. | Nozzle Size | Forward Jets | Rearward Jets |
|----------|-------------|--------------|---------------|
| J-1301 | ¾" | 1 | 6 |
| J-1303 | ¾" | 0 | 6 |
| J-1305 | 1" | 0 | 6 |




| Part No. | Nozzle Size | Nozzle Type | Jet Angle | Forward Jet | Rearward Jet |
|----------|-------------|-------------|-------------|-------------|--------------|
| J-1201 | ¾" | Gang | 30° | 0 | 5 |
| J-1203 | ¾" | Gang | 30° | 1 | 8 |
| J-1401 | ¾" | Gang | Dual degree | 1 | 16 |
| J-1205 | ¾" | Tandem gang | 30° | 0 | 16 |
| J-1207 | ¾" | Tandem gang | 30° | 1 | 16 |
| J-1211 | 1" | Gang | 30° | 0 | 8 |
| J-1209 | 1" | Gang | 30° | 1 | 8 |
| J-1403 | 1" | Gang | Dual degree | 1 | 16 |
| J-1213 | 1" | Tandem gang | 30° | 0 | 16 |
| J-1215 | 1" | Tandem gang | 30° | 1 | 16 |

Replaceable Jets for Gang & Aluminum Ram Nozzles

| Part No. | Nozzle Size |
|-----------|-----------------------------------|
| J-Jet-564 | For 1" Gang nozzle |
| J-Jet-116 | For 1" Dual or tandem gang nozzle |
| J-Jet-116 | For ¾" Gang nozzle |
| J-Jet-364 | For ¾" Dual or tandem gang nozzle |

Water Jet Accessories

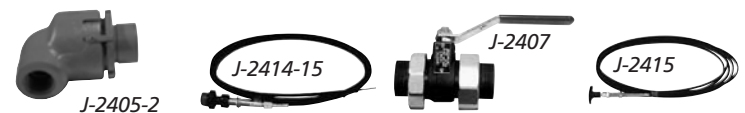

| Part No. | Description |
|-----------|------------------------------|
| J-2405-2 | Rotary coupling |
| 4147-5400 | Repair kit rotary coupling |
| J-2407 | Water cutoff ball valve |
| 4114-8001 | Ball valve seal kit |
| J-2414-15 | Throttle control cable (15') |
| J-2415 | Choke control (25') |
| J-2416 | Pressure relief valve |
| 4116-2500 | Water level gauge |
| J-2431A | Water pressure gauge |
| RL650A | Magnetic Beacon |
| SL650A | Magnetic Strobe |



J-2431A



RL650A



SL650A

1-800-638-1901

Call toll-free to place your order

Specifications subject to change without notice. All prices F.O.B. Marietta, OH 45750.

Sewer Cleaning Hose

Sewer Cleaning Hose

Because of its stiffness, thermoplastic hose is made to be pushed up a line. Plus, its sleek surface washes clean to avoid bacteria buildup.



| Part No. | Hose Material | Hose Size | Working psi |
|----------|---------------|-----------|-------------|
| 15030 | Thermoplastic | 1/8" | 3,000 |
| 15009 | Thermoplastic | 3/16" | 3,000 |
| 15034 | Thermoplastic | 1/8" | 2,750 |
| 20037 | Thermoplastic | 1/4" | 5,000 |
| 15008 | Rubber | 3/8" | 3,000 |
| 15029 | Thermoplastic | 3/8" | 2,250 |
| 20032 | Thermoplastic | 3/8" | 4,000 |
| 15032 | Thermoplastic | 1/2" | 2,000 |
| J-1942 | Thermoplastic | 1/2" | 4,000 |
| J-1946 | Thermoplastic | 5/8" | 4,000 |
| J-1940 | Thermoplastic | 3/4" | 2,500 |
| J-1943 | Thermoplastic | 3/4" | 3,000 |
| J-1941 | Thermoplastic | 1" | 2,500 |
| J-1944 | Thermoplastic | 1" | 3,000 |
| J-1945 | Thermoplastic | 1 1/4" | 2,500 |

Dayco Eastman and Piranha® hoses are available. Ask for details. Other Lengths available.

Leader Hose

Leader hose color contrasts/differs from hose color of indicated size.



| Part No. | Hose Material | Hose Size |
|----------|---------------|------------|
| J-1909 | Thermoplastic | 3/8" x 20' |
| J-1910 | Thermoplastic | 1/2" x 20' |
| J-1905 | Rubber | 3/4" x 20' |
| J-1921 | Rubber | 1" x 20' |

Other lengths available.

Hose Mending Equipment

The Hydraulic Swage is a hand operated hydraulic pump for easy in field repairs. Complete set to stay with this unit no matter what size hose they are crimping all the dies & pushers go with it. Consist of:

| Part No. | Description |
|----------|-------------|
| J-205 | Swage tool |
| | 1/2" die |
| | 1/2" pusher |
| | 3/4" die |
| | 3/4" pusher |
| | 1" die |
| | 1" pusher |




PIRANHA
ONLY

Other mending equipment and sizes are available. Call with your needs!

Hose Fittings - specify Dayco or Piranha

| Part No. | Description |
|----------|--------------|
| J-1940-1 | 3/4" male |
| J-1940-2 | 3/4" mender |
| J-1940-3 | 3/4" adapter |
| J-1940-4 | 3/4" female |
| J-1941-1 | 1" male |
| J-1941-2 | 1" mender |
| J-1941-3 | 1" adapter |
| J-1941-4 | 1" female |

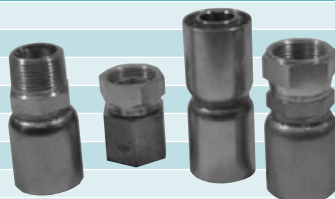

Portable Auxiliary Hose Reel

| Part No. | Description |
|--------------|---|
| 30027A | Portable aux. hose reel w/150' of 3/8" O'Brien sewer cleaning hose with short handle |
| OB40027A | Portable aux. hose reel w/150' of 3/8" O'Brien sewer cleaning hose with luggage style handle & wheels |
| 30027A-RETRO | Turn your 30027A into OB40027A with this kit |



Lateral Cleaning Kit

J-2432 includes:

- 2-wheeled cart
- Inlet hose
- Hose reel
- 3/8" x 150' O'Brien sewer cleaning hose
- 2 nozzles



Jet Vac Hose

Turn your cart-mounted jetter into a wet vacuum

J-1851

- 11:1 Ratio
- Used for flooded area such as:
 - Basements
 - Swimming pools and more
- Available in 15' or 25' lengths
- Can be used with the 2-wheel & 4-wheel cart jetters



Sewer Cleaning Accessories

Manhole Cover Hooks

| Part No. | Description |
|----------|-----------------|
| 251-429 | 24" flat handle |
| 015-443 | 24" 90° handle |
| 015-438 | 36" 90° handle |



Manhole Jack

| Part No. | Description |
|----------|--------------|
| M-4001 | Manhole jack |



Washdown Gun

| Part No. | Description |
|----------|--|
| 15007 | Gun, wand and nozzle (hose not included) |

Hydrant Fill Hose

Refill your Jetter water supply tank by running this hose from the nearest hydrant. Hose collapses for easy rollup and storage.

| Part No. | Description |
|----------|--------------------|
| J-2443 | 2" x 25' fill hose |



Upstream Pulley Guide

Position this guide over the manhole to protect your Jetter hose from wearing against the edge of the manhole. The pulley eases tension on the hose. Powder coated frame.

| Part No. | Description |
|----------|-----------------------|
| J-2401 | Upstream pulley guide |



Manhole Safety Cover

Cover has opening with 5" removal roller. The wire matting provides excellent visual access. Bolts in inner ring allow for adjustment to specified diameters. Powder coated to resist corrosion.

| Part No. | Manhole Safety Cover Size |
|----------|---------------------------|
| 2023 | 20"-23" |
| 2326 | 23"-26" |
| 2630 | 26"-30" |



Myers Portable Gas-Powered Water Pump

Easy start, 4-cycle, Honda gasoline engine self priming pump provides 40 gpm suction and heavy-duty cast aluminum housing.

| Part No. | Description |
|----------|---|
| MCPH | System Includes: 1" Suction Hose Suction Strainer Garden hose adapter for discharge Tool Kit to change Spark Plug |

Tiger Tail With Rope

The tiger tail protects your Jetter hose from chafing against the manhole entry.


| Part No. | Description |
|----------|----------------------------|
| J-2204 | 2" x 36" tiger tail w/rope |
| J-2203 | 3" x 36" tiger tail w/rope |
| J-2205 | 3" x 42" tiger tail w/rope |
| J-2206 | 4" x 36" tiger tail w/rope |



Level Wind Guide

The level wind guide measures hose footage off the reel so you know exactly how far up the pipe you are. When reeling the hose in, it makes sure the hose winds up evenly.


| Part No. | Description |
|-----------|---|
| OBJ-2430A | Level wind guide with counter for 1/2"-1" hose |
| OBJ-2430B | Level wind guide without counter for 3/4"-1" hose |
| OBJ-2430S | Level wind guide for 1/2" hose |

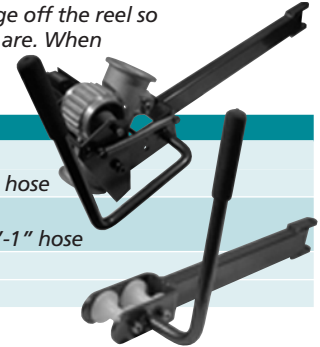

Grit Catcher

With a grit catcher at the manhole opposite the hose entrance, you can remove cobble and other debris before it's carried further downstream by your flush water. The grit catcher is powder coated for durability.

| Part No. | Description |
|----------|-----------------|
| OB00016A | 6" grit catcher |
| OB00018A | 8" grit catcher |



Retractable Hose Reel

| Part No. | Description |
|------------|---|
| OBJ-123000 | 1/2" x 50' Retractable Hose Reel Wall Mounted |

- Swivel Base
- Made of UV Resistant Polypropylene
- Spring Retraction



Dimensions of OBJ-123000:

Height – 19"
Width – 9 1/2"
Length – 21 1/4"

Manhole Debris Grabber

Handy, easy to use device for removing sticks, rocks & other forms of debris from manholes or catch basins without having to enter the manhole. Three sections, each 5' long. easily collapsible. Equipped with 20' ploy line. Made of rugged steel for long life.

| Part No. | Description |
|----------|------------------------|
| OBJ-299 | Manhole Debris Grabber |



1-800-638-1901
Call toll-free to place your order

Specifications subject to change without notice. All prices F.O.B. Marietta, OH 45750.

Company Policies

Payment

Options:

- Open Account with Terms - Net 30 Days
- Cash
- Personal, Certified or Company Check with approval (\$25 service fee on returned checks)
- Money Order
- Credit Card—MasterCard, VISA, or Discover
- Wire Transfer—Contact Accounting

Note for our international customers: all orders must be paid in U.S. dollars.

Credit

All accounts that reach 30 days past due will be contacted to arrange payment. At 45 days past due, all orders will be put on credit hold.

Shipment/Delivery

We ship via UPS and LTL. Any documentation or expediting fees incurred in shipment of a product shall be billed to the customer. A nominal handling charge is added to all orders shipped UPS.

Returns

Our receiving department cannot accept a return without an ATR number. Before you return an item, please call our customer service dept. at 800-638-1901, extension 161, and request a Authorization to Return form and number. All returned items may be subject to a 20% restocking charge. All returns are subject to inspection and may be rejected if not in condition to resell. All ATRs expire after 60 days.

Damaged Goods

The customer is responsible for freight claims for damaged or missing shipments.

Warranty

O'Brien Manufacturing hereinafter called the Company, warrants for a period of twelve (12) months from the date this product is accepted by the purchaser, that all design and material of its own manufacture shall be free from defects. The company agrees to repair or replace, at its sole discretion, such defects to assure the product performs according to its published specifications at time of manufacture.

This warranty will not cover any part or service subject to normal wear or adjustment as described in the Operator's Manual supplied with the product. This warranty will not cover failure caused by the purchaser's failure to perform normal maintenance by abuse, or by purchaser's use of product for purposes not intended by design. Alterations or modifications to product without the express written permission of the Company may void this warranty. Use of replacement parts not supplied by the Company may void this warranty. All parts supplied under the provisions of this warranty are F.O.B. Marietta, Ohio.

This warranty shall be the only warranty in effect, and no one shall have the authority to supersede or modify its provisions except in writing by the Company, or as provided by these terms. All replacement parts warranted for 30 days.

Major Components Warranty

Components provided as part of this product, but those which are not manufactured by the Company (i.e. engine, pump, etc.), shall have whatever warranty and terms as are offered by the original manufacturer and shall not be covered by these provisions except where specifically stated. These warranties shall be provided upon request. The Company shall make good faith efforts on behalf of the purchaser to enforce any applicable warranty offered by its vendors.

O'Brien Manufacturing builds CUSTOM HYDROJETTERS

Call Today with your specifications and to receive a quote.



White unit pictured was built to order. Customer requested extra water capacity, detachable storage basket, as well as many other optional features.



Unit pictured above was custom built for a customer - controls are mounted on left side.

O'BRIENTM
MANUFACTURING
www.obrienmf.com

Visit Our Website for more parts & accessories

Once a Hydrojetter™ user, Always a Hydrojetter™ user.

In 1966, Joe Sr. started a sewer cleaning business with his first Hydrojetter™

In 1988, Joe Jr. joined the family business that owned a fleet of Hydrojetters.

Today, Joe Jr.'s Son will be trained on the company's newest generation of Hydrojetters.



O'Brien® Hydrojetter™
7040SC Series

O'Brien® Hydrojetter™
3515-FC Series

O'Brien® Hydrojetter™
3518-SH Series

Generation after generation, the O'Brien® Hydrojetter™ has passed the most important test – the test of time. Like Joe Sr., a lot of sewer cleaning professionals still remember the first time they used a Hydrojetter™. They knew immediately it was a piece of equipment they could depend on. Then day after day, the Hydrojetter™ proved to them, its innovative design and tough, quality construction delivered unmatched performance in the toughest working environments.

HydroJetter®

A SMART BUSINESS DECISION

O'BRIEN™
MANUFACTURING
A PRODUCT OF HI-VAC CORPORATION

To test for yourself the newest O'Brien® Hydrojetter™ models contact us at:
740-374-2306 • Toll Free USA: 800-638-1901 • www.obrien.com

1-800-638-1901

Call toll-free to
place your order



or Place your order online: www.obrienmfg.com

Call Toll-Free to Place Your Order

1-800-638-1901

O'BRIENTM
MANUFACTURING

Hi-Vac Corporation
117 Industry Road
Marietta, Ohio 45750
www.obrienmfg.com

